

Introducing the Apturi III Full Spectrum 97 CRI Integrated LED luminaire (Standard-Dimmable).

A complete, dimmable LED track lighting solution for discerning art galleries, museums, retail stores and more.

When illuminating artwork and displays, uncompromising colour accuracy and beam-angle control are critical. The elegant Apturi III provides you with both.

Consuming only 15 watts, it produces over 1,400 lumens of light.

Strict colour binning ensures that the light from each of Apturi III LED track head looks the same from one to the next.

Beam-Adjustable

A simple twist of the lens takes you from a narrow spot to broad wall-washing, with a range of 10 to 60 degrees.

Standard-Dimmable

Compatible with most Lutron-style or other common leading/trailing-edge wall dimmers (MLV & ELV), allowing you to adjust light output across multiple fixtures at once.

Track Compatible

Comes standard for H-type track systems (Halo-compatible). J (Juno) and L type (Lightolier) track connectors upon request. Conversions to other track connectors are also available.



Optional Accessories

Honeycomb Louver



The honeycomb louver is an excellent glare control solution. With a Honeycomb Louver installed, viewing the light source from an oblique angle is more comfortable as it greatly reduces side glare.

It mounts on the front of the luminaire using a small discreet mounting ring, which is available in white or black.

The honeycomb itself is only available in black to prevent unwanted reflections.

The honeycomb louver can be combined with barn doors.

Barn Doors



Barn doors are a versatile light-shaping tool, used to maintain focus on the work being lit and reducing or eliminating spill onto the surrounding wall or floor.

When used on a painting it can create the effect that the work is illuminated from within.

Barn doors mount on the front of the luminaire using a small discreet mounting ring, which can be white or black.

Available in black and white.

Short Snoot





The short snoot is an alternate glare control solution. The snoot hides the light source when viewed from an oblique angle, making the viewer experience more comfortable.

Mounts on the front of the luminaire.

Available in black and white.

Colorimetric Data at 3000K

Bridgelux Thrive

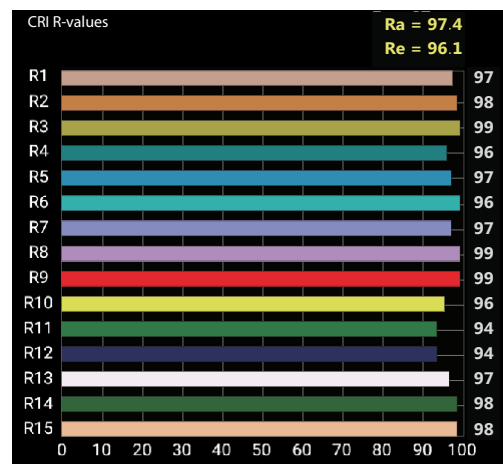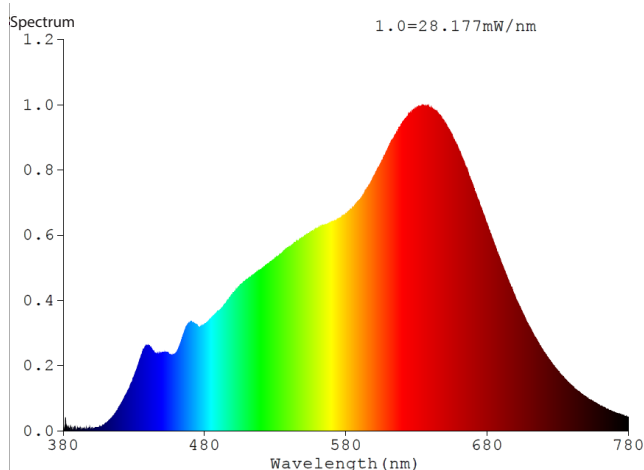

Product Configuration by Code

A3- CCT - FINISH - CONNECTOR - ACCESSORY (OPTIONAL)

Example: A3-30K-WH-HL-SN (Apturi3 3000K White Finish, Halo Track Connector, Snoot)

Available Colour Temperatures & Order Codes:

Description (LED Colour Temperature)	Order Code
3000K 97 CRI	30K
4000K 97 CRI	40K

Available Finishes & Order Codes:

Description (Finish Colour)	Order Code
White	WH
Black	BK

Available Track Connectors & Order Codes:

Description (Track Connector)	Order Code
H-type (Halo Compatible)	HL
J-type (Juno Compatible)	JN
L-type (Lightolier Compatible)	LT
Proprietary gallery connector	PR

Available Light Shaping Accessories & Order Codes:

Description (Accessory)	Order Code
Honeycomb	HC
Barn Door	BD
Snoot	SN