




## Product information and test conditions

<b>Name</b>	SKU 1049 DTW 2200K	
<b>Time</b>	2021-04-14 08:29:52(Time-zone GMT+8)	
<b>Manufacturer</b>	Lumicrest LED Lighting	
<b>User</b>	David Geldart (david@lumicrest.com)	
<b>Temperature(°C)</b>	<b>Humidity(%)</b>	<b>Distance(m)</b>


## Parameters

<b>CIE_x</b>	0.5012
<b>CIE_y</b>	0.4074
<b>CCT</b>	2191 K
<b>Duv</b>	-0.0025
<b>CRI (Ra)(R1~R8)</b>	96
<b>CRI (Re) (R1-R15)</b>	95
<b>CQS</b>	94
<b>TLCI(Qa)</b>	91
<b>GAI</b>	37
<b>TM-30-18 Rf</b>	93
<b>TM-30-18 Rg</b>	103
<b>Circadian Stimulus</b>	0.10
<b>Circadian Light</b>	71

## Spectrum

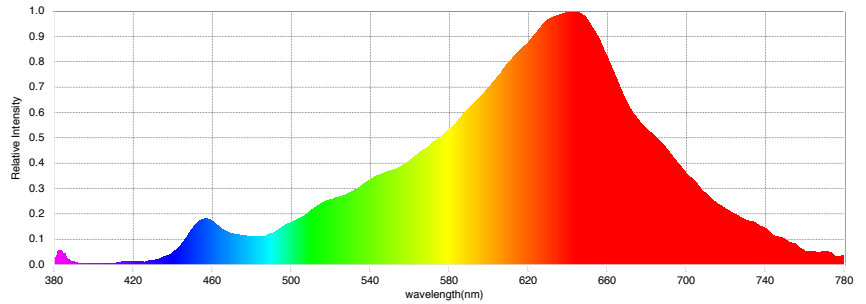


## CIE 1931

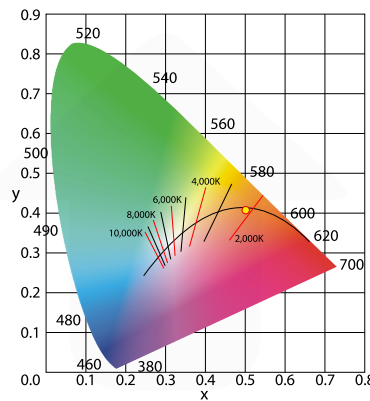


## CIE 1976

## C78.377 - 2017

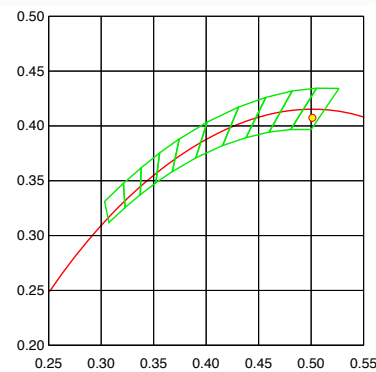

## IEC-SDCM

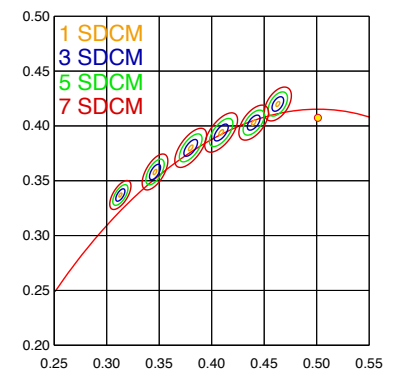

## CRI (Re) (R1-R15)

R1	98	R6	95	R11	98
R2	99	R7	92	R12	90
R3	99	R8	88	R13	99
R4	97	R9	77	R14	99
R5	99	R10	99	R15	95

## TM-30-18

